


FJ5461AH - 4 Digit Common Cathode LED Display – High Efficiency Red


Electrical Characteristics:

Peak forward current (10% duty cycle, 0.1ms max.)	80	mA
Maximum power dissipation	75	mW
Maximum continuous forward current	20	mA
Recommended continuous forward current	12	mA
Maximum reverse voltage	5	V
Operating temperature	-25°C to +85°C	

MECHANICAL OUTLINE:

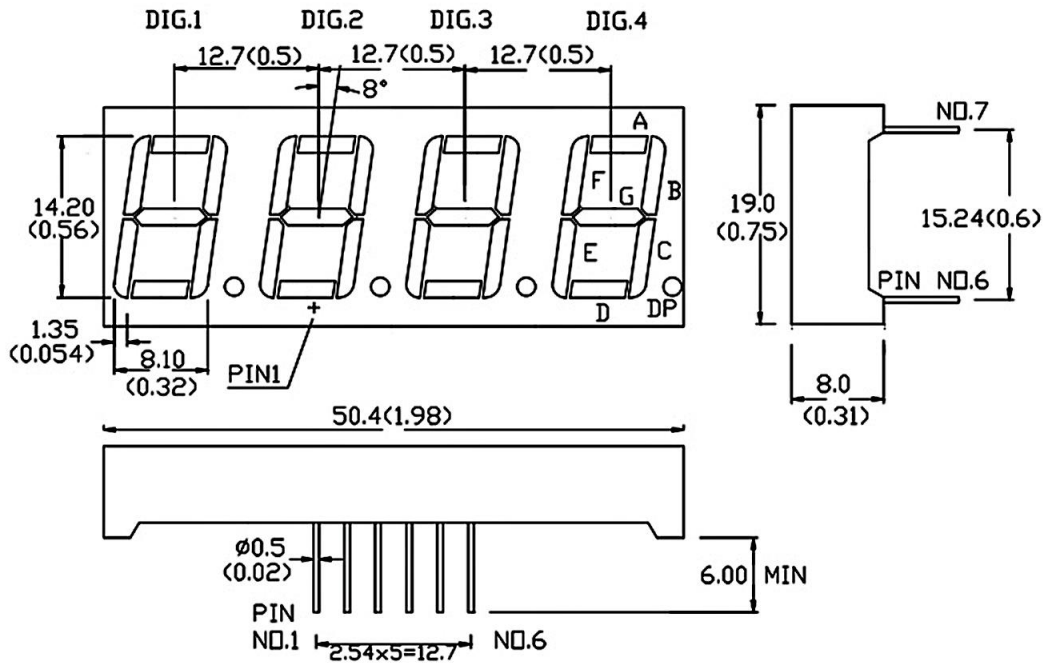

(B) COMMON CATHODE

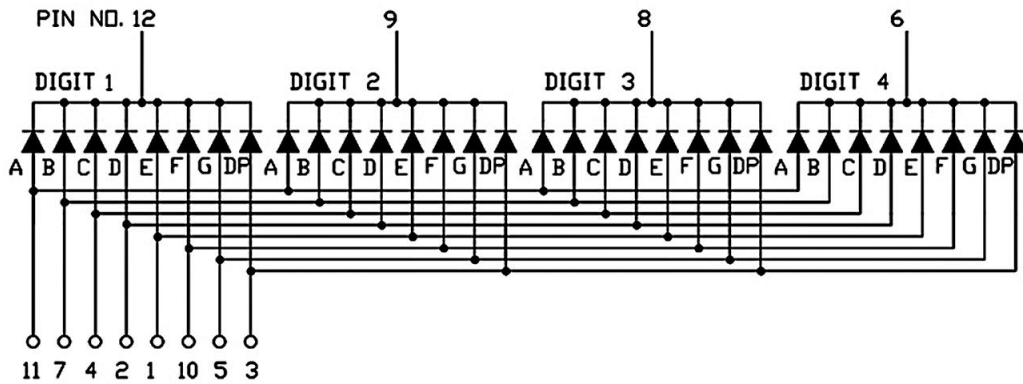

This Datasheet was downloaded from:



www.aztecmcu.com

Boards, parts and accessories for Arduino and PICAXE projects